


F	E	D	C	B	A
MODEL	BETA RATIO		FILTERING AREA	NOTES	
	BETA=200 99.5%	BETA=1000 99.9%			
PH518-01-C	15 MICRON	17 MICRON	1070 SQ. IN.		
PH518-01-CVSSS	15 MICRON	17 MICRON	1070 SQ. IN.	STAINLESS STEEL	
PH518-03-C	25 MICRON	27 MICRON	1070 SQ. IN.		
PH518-05-C	41 MICRON	43 MICRON	1070 SQ. IN.		
PH518-05-CX	41 MICRON	43 MICRON	1070 SQ. IN.		
PH518-10-C	51 MICRON	53 MICRON	1820 SQ. IN.		
PH518-11-C	10 MICRON	12 MICRON	1070 SQ. IN.		
PH518-12-C	4 MICRON	6 MICRON	1070 SQ. IN.		
PH518-12-CF	4 MICRON	6 MICRON	1070 SQ. IN.		
PH518-14-C	3 MICRON	5 MICRON	_____ SQ. IN.		
PH518-16-C	2 MICRON	3 MICRON	_____ SQ. IN.		
PH518-20-C	69 MICRON	74 MICRON	1820 SQ. IN.		
PH518-40-C	100 MICRON	125 MICRON	1820 SQ. IN.		

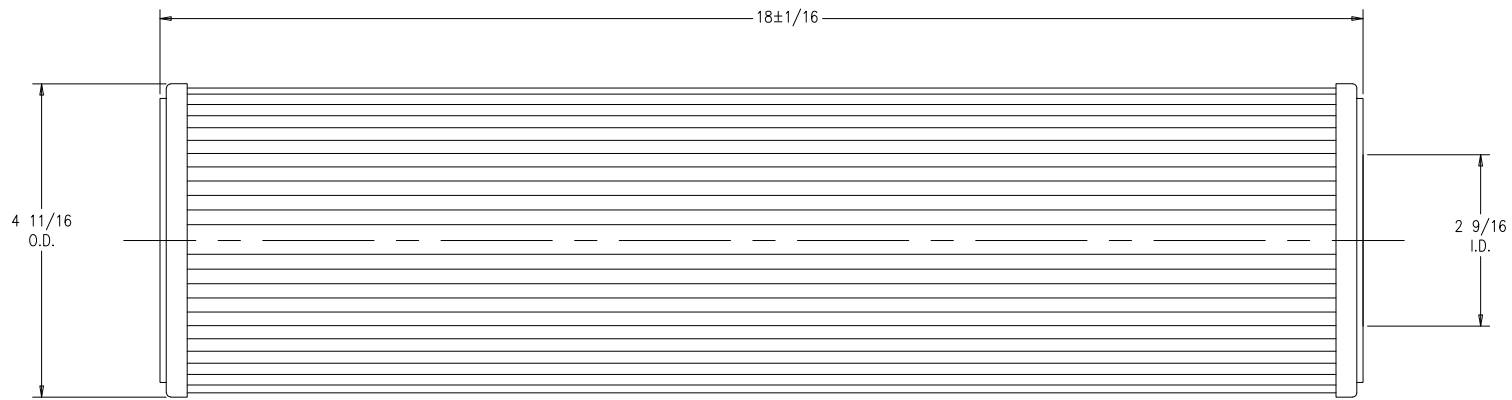

- PHYSICAL CHARACTERISTICS
1. MOLDED URETHANE ENDS
  2. CORROSION RESISTANT CENTERTUBE
  3. SYNTHETIC MICROGLASS MEDIA SUPPORTED BY SCREEN
  4. 250°F MAX. TEMPERATURE
  5. 100 PSID COLLAPSE STRENGTH

THE FOLLOWING ARE GUIDELINES FOR ACCEPTABLE OPERATING CONDITIONS FOR THE PH518-12-CF CARTRIDGE:

1. NON-CRITICAL LOWER FLOW; NOT TO EXCEED 50 GPM/CARTRIDGE.
  2. DO NOT USE FOR ANY FLUSHING APPLICATIONS.
  3. SYSTEMS WHERE DIRT HOLDING IS NOT CRITICAL.
- IF THE OPERATING SYSTEM IS OUTSIDE THE ABOVE CONDITIONS, CONTACT THE HILLIARD CORPORATION'S SALES DEPARTMENT FOR THE CORRECT CARTRIDGE.

B	CHG'D TABLE	GF	9/14/98	GLF
A	REMOVED RETAINING BAND	GF	7/21/95	GLF
REV	DESCRIPTION	BY	DATE	APP

THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994

DRAWING STATUS	<b>PRODUCTION</b>
----------------	-------------------

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED MAKE FROM	UNLESS OTHERWISE SPECIFIED <input checked="" type="checkbox"/> INCHES <input type="checkbox"/> MILLIMETERS UNLESS OTHERWISE SPECIFIED BREAK CORNERS .015" MAX	 THE HILLIARD CORPORATION 100 WEST FOURTH STREET ELMSFA, NEW YORK 14902 DIMENSIONS ARE IN INCHES ( ) DIMENSIONS IN MM	DRAWN BY: GF DATE: 3/17/94 CHECKED BY: GLF DATE: 3/17/94 APPROVED BY: JB DATE: 3/21/94	TITLE PH518-**-C PLEATED INDUSTRIAL CARTRIDGE	
	UNLESS OTHERWISE SPECIFIED: FRACTIONAL DIMENSIONS - ± 1/16 DECIMAL DIMENSIONS - .001 ± 0.015 ANGLES - ± 2°		SIMILAR TO: SCALE: NONE	SHEET 1 OF 1	DD-700-11
					<b>C</b>

F E D C B A