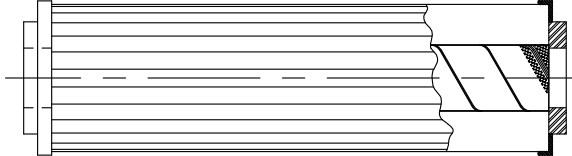



F		E		D		C		B		A																																																														
FLUID DESCRIPTION		APPLICATION		MODEL		OVERALL LENGTH NOMINAL		O.D.		I.D.		SHIPPING WEIGHT PER CARTON OF 4		CARTON DIMENSION PER CARTON OF 4		FILTERING AREA																																																								
4	FUEL OIL	DIESEL, TURBINE		PL310-01-C		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		467 SQ. IN.																																																								
	INSULATING PL310-12-C PL310-12-CV PL310-12-BC	TRANSFORMERS, BREAKERS, CABLE		PL310-03-C		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		469 SQ. IN.																																																								
				PL310-03-CV		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		469 SQ. IN.																																																								
				PL310-03-BC		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		469 SQ. IN.																																																								
				PL310-05-C		9 11/16"		2 3/4"		1 1/16"		2.0 POUNDS		7" x 7" x 11"		444 SQ. IN.																																																								
CUTTING OIL	CHIP WRINGER, SCREW MACHINES		PL310-05-CV		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		444 SQ. IN.																																																									
			PL310-05-SC		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		444 SQ. IN.																																																									
GAS COMPRESSOR	COMPRESSOR LUBE		PL310-05-BC		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		444 SQ. IN.																																																									
GEAR OIL	GEAR BOX		PL310-10-C		9 11/16"		2 3/4"		1 1/16"		3.0 POUNDS		7" x 7" x 11"		410 SQ. IN.																																																									
3	ROLLING OIL PL310-12-C PL310-12-CV PL310-12-BC	FLOOD LUBE FOR ROLLING MILL		PL310-10-CV		9 11/16"		2 3/4"		1 1/16"		3.0 POUNDS		7" x 7" x 11"		410 SQ. IN.																																																								
				PL310-10-BC		9 11/16"		2 3/4"		1 1/16"		3.0 POUNDS		7" x 7" x 11"		410 SQ. IN.																																																								
				PL310-12-C		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		304 SQ. IN.																																																								
				PL310-12-CV		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		304 SQ. IN.																																																								
2	HYDRAULIC OIL PL310-12-C PL310-12-CV PL310-12-BC	TRANSMISSION MGF, DIECAST, PLASTIC INJECTION MOLDING TURBINE EHC		PL310-12-BC		9 11/16"		2 3/4"		1 1/16"		2.5 POUNDS		7" x 7" x 11"		304 SQ. IN.																																																								
				LUBE OIL		ENGINE, COMPRESSOR																																																																		
				QUENCH OIL		HEAT TREAT QUENCHING																																																																		
				SILICONE OIL		HEAT TRANSFER																																																																		
1					<table border="1"> <thead> <tr> <th colspan="4">BETA RATIO & EFFICIENCY</th> </tr> <tr> <th>MODEL</th> <th>BETA=200 99.5%</th> <th>BETA=75 98.7%</th> <th>GASKET MAT'L</th> </tr> </thead> <tbody> <tr><td>PL310-01-C</td><td>15 MICRON</td><td>13 MICRON</td><td>NITRILE</td></tr> <tr><td>PL310-03-C</td><td>30 MICRON</td><td>28 MICRON</td><td>NITRILE</td></tr> <tr><td>PL310-03-CV</td><td>30 MICRON</td><td>28 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PL310-03-BC</td><td>30 MICRON</td><td>28 MICRON</td><td>BUTYL</td></tr> <tr><td>PL310-05-C</td><td>44 MICRON</td><td>41 MICRON</td><td>NITRILE</td></tr> <tr><td>PL310-05-CV</td><td>44 MICRON</td><td>41 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PL310-05-SC</td><td>44 MICRON</td><td>41 MICRON</td><td>NITRILE</td></tr> <tr><td>PL310-05-BC</td><td>44 MICRON</td><td>41 MICRON</td><td>BUTYL</td></tr> <tr><td>PL310-10-C</td><td>52 MICRON</td><td>49 MICRON</td><td>NITRILE</td></tr> <tr><td>PL310-10-CV</td><td>52 MICRON</td><td>49 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PL310-10-BC</td><td>52 MICRON</td><td>49 MICRON</td><td>BUTYL</td></tr> <tr><td>PL310-12-C</td><td>4 MICRON</td><td>3 MICRON</td><td>NITRILE</td></tr> <tr><td>PL310-12-CV</td><td>4 MICRON</td><td>3 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PL310-12-BC</td><td>4 MICRON</td><td>3 MICRON</td><td>BUTYL</td></tr> </tbody> </table>		BETA RATIO & EFFICIENCY				MODEL	BETA=200 99.5%	BETA=75 98.7%	GASKET MAT'L	PL310-01-C	15 MICRON	13 MICRON	NITRILE	PL310-03-C	30 MICRON	28 MICRON	NITRILE	PL310-03-CV	30 MICRON	28 MICRON	FLUOROCARBON	PL310-03-BC	30 MICRON	28 MICRON	BUTYL	PL310-05-C	44 MICRON	41 MICRON	NITRILE	PL310-05-CV	44 MICRON	41 MICRON	FLUOROCARBON	PL310-05-SC	44 MICRON	41 MICRON	NITRILE	PL310-05-BC	44 MICRON	41 MICRON	BUTYL	PL310-10-C	52 MICRON	49 MICRON	NITRILE	PL310-10-CV	52 MICRON	49 MICRON	FLUOROCARBON	PL310-10-BC	52 MICRON	49 MICRON	BUTYL	PL310-12-C	4 MICRON	3 MICRON	NITRILE	PL310-12-CV	4 MICRON	3 MICRON	FLUOROCARBON	PL310-12-BC	4 MICRON	3 MICRON	BUTYL		
	BETA RATIO & EFFICIENCY																																																																							
	MODEL	BETA=200 99.5%	BETA=75 98.7%	GASKET MAT'L																																																																				
	PL310-01-C	15 MICRON	13 MICRON	NITRILE																																																																				
	PL310-03-C	30 MICRON	28 MICRON	NITRILE																																																																				
	PL310-03-CV	30 MICRON	28 MICRON	FLUOROCARBON																																																																				
	PL310-03-BC	30 MICRON	28 MICRON	BUTYL																																																																				
	PL310-05-C	44 MICRON	41 MICRON	NITRILE																																																																				
	PL310-05-CV	44 MICRON	41 MICRON	FLUOROCARBON																																																																				
	PL310-05-SC	44 MICRON	41 MICRON	NITRILE																																																																				
	PL310-05-BC	44 MICRON	41 MICRON	BUTYL																																																																				
	PL310-10-C	52 MICRON	49 MICRON	NITRILE																																																																				
	PL310-10-CV	52 MICRON	49 MICRON	FLUOROCARBON																																																																				
PL310-10-BC	52 MICRON	49 MICRON	BUTYL																																																																					
PL310-12-C	4 MICRON	3 MICRON	NITRILE																																																																					
PL310-12-CV	4 MICRON	3 MICRON	FLUOROCARBON																																																																					
PL310-12-BC	4 MICRON	3 MICRON	BUTYL																																																																					
PHYSICAL CHARACTERISTICS: 1- MOLDED URETHANE ENDS. 2- CORROSION RESISTANT CENTERTUBE. 3- MAXIMUM OPERATING TEMPERATURE IS 250°F. 4- 100 PSI COLLAPSE STRENGTH. 5- ALL CARTRIDGES ARE CONSTRUCTED WITH AN OUTSIDE PERFORATED AMBIENT EXCEPT FOR PL310-01-C, PL310-12-C, PL310-12-CV & PL310-12-BC.										<table border="1"> <tr> <td>C</td> <td>WAS NYLON CENTERTUBE</td> <td>ROC</td> <td>07/06/10</td> <td>LTH</td> </tr> <tr> <td>B</td> <td>REVISED BETA RATINGS & MICRON RATINGS; REDRAWN FROM CADKEY</td> <td>ROC</td> <td>06/02/09</td> <td>LTH</td> </tr> <tr> <td>A</td> <td>REDRAWN</td> <td>DPM</td> <td>05/11/99</td> <td>GLF</td> </tr> <tr> <td>REV</td> <td>DESCRIPTION</td> <td>BY</td> <td>DATE</td> <td>APP</td> </tr> </table>		C	WAS NYLON CENTERTUBE	ROC	07/06/10	LTH	B	REVISED BETA RATINGS & MICRON RATINGS; REDRAWN FROM CADKEY	ROC	06/02/09	LTH	A	REDRAWN	DPM	05/11/99	GLF	REV	DESCRIPTION	BY	DATE	APP																																									
C	WAS NYLON CENTERTUBE	ROC	07/06/10	LTH																																																																				
B	REVISED BETA RATINGS & MICRON RATINGS; REDRAWN FROM CADKEY	ROC	06/02/09	LTH																																																																				
A	REDRAWN	DPM	05/11/99	GLF																																																																				
REV	DESCRIPTION	BY	DATE	APP																																																																				
				THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994		DRAWING STATUS		<h2>PRODUCTION</h2>																																																																
				THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION. ALL RIGHTS RESERVED. MAKE FROM		UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED				DRAWN BY: GF 02/22/96 CHECKED BY: GLF 02/22/96 APPROVED BY: JB 03/07/96		TITLE: PL310-**-C PLEATED INDUSTRIAL CARTRIDGE		SHEET 1 OF 1 DD-700-38 C																																																										
				UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED		SIMILAR TO: _____ SCALE: FULL																																																																		