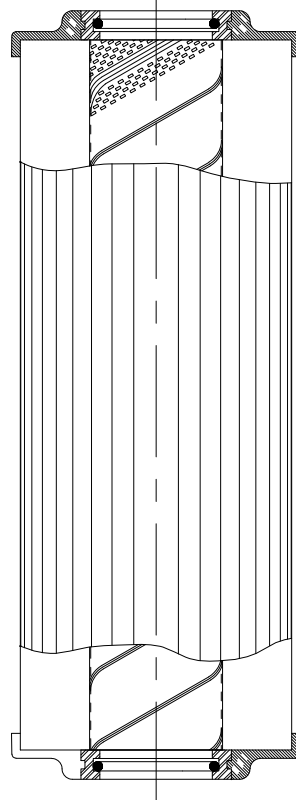



F		E		D		C		B		A																																																																									
FLUID DESCRIPTION	APPLICATION	MODEL	OVERALL LENGTH	O.D.	I.D.	FILTERING AREA																																																																													
BEARING LUBE	TURBINE LUBE, MINERAL OIL PHOSPHATE ESTER	PH511-01-CG	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-01-CGV	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-03-CG	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
COOLANT	MACHINE TOOL COOLANT	PH511-03-CGV	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-05-CG	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
CUTTING OIL	CHIP WRINGER, SCREW MACHINES	PH511-05-CGS	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-05-CGV	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
FUEL GAS	DIESEL, TURBINE	PH511-05-CGV	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
GAS COMPRESSOR	COMPRESSOR LUBE	PH511-10-CG	11 1/2"	4 5/16"	1 11/16"	1208 SQ. IN.																																																																													
GEAR OIL	GEAR BOX	PH511-10-CGV	11 1/2"	4 5/16"	1 11/16"	1208 SQ. IN.																																																																													
HEAT TRANSFER, SYNTHETIC, GLYCOL, SILICONE, FREON PH511-12-CG	HEAT TRANSFER ENGINE COOLANT	PH511-11-CG	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-12-CG	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-12-CGV	11 1/2"	4 5/16"	1 11/16"	765 SQ. IN.																																																																													
		PH511-20-CG	11 1/2"	4 5/16"	1 11/16"	1208 SQ. IN.																																																																													
HYDRAULIC OIL PH511-12-CG	TRANSMISSION MFG., DIECAST, PLASTIC INJECTION MOLDING TURBINE EHC	PH511-20-CGV	11 1/2"	4 5/16"	1 11/16"	1208 SQ. IN.																																																																													
		PH511-40-CG	11 1/2"	4 5/16"	1 11/16"	1208 SQ. IN.																																																																													
		PH511-40-CGV	11 1/2"	4 5/16"	1 11/16"	1208 SQ. IN.																																																																													
LUBE OIL	ENGINE, COMPRESSOR	NOTE: USE PARKER SUPER O-LUBE ON "O" RING BEFORE INSTALLING IN VESSEL																																																																																	
		NATURAL GAS	FUEL																																																																																
		PHOSPHATE ESTERS	TURBINE LUBE, HYDRAULIC																																																																																
		POLYGLYCOLS	COMPRESSOR LUBE HEAT TRANSFER																																																																																
		POLYOL ESTERS	AERODERIVATIVE TURBINE LUBE																																																																																
		QUENCH OIL	HEAT TREAT QUENCHING																																																																																
		SILICONE OIL	HEAT TRANSFER																																																																																
		VACUUM PUMP SEAL, LUBE OIL	CHIP AND WAFER FABRICATION																																																																																
		<p>PHYSICAL CHARACTERISTICS:</p> <ol style="list-style-type: none"> MOLDED URETHANE/METAL END CAPS. CORROSION RESISTANT CENTERTUBE. FILTER MEDIA PROTECTED ON BOTH SIDES BY EPOXY COATED SCREENS MAXIMUM OPERATING TEMPERATURE IS 250°F. 100 PSI COLLAPSE STRENGTH. 																																																																																	
		<table border="1"> <thead> <tr> <th colspan="4">BETA RATIO & EFFICIENCY</th> </tr> <tr> <th>MODEL</th> <th>BETA=200 99.5%</th> <th>BETA=1000 99.9%</th> <th>O-RING MAT'L</th> </tr> </thead> <tbody> <tr><td>PH511-01-CG</td><td>15 MICRON</td><td>17 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-01-CGV</td><td>15 MICRON</td><td>17 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PH511-03-CG</td><td>25 MICRON</td><td>27 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-03-CGV</td><td>25 MICRON</td><td>27 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PH511-05-CG</td><td>41 MICRON</td><td>43 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-05-CGS</td><td>41 MICRON</td><td>43 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-05-CGV</td><td>41 MICRON</td><td>43 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PH511-10-CG</td><td>51 MICRON</td><td>53 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-10-CGV</td><td>51 MICRON</td><td>53 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PH511-11-CG</td><td>10 MICRON</td><td>12 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-12-CG</td><td>4 MICRON</td><td>6 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-12-CGV</td><td>4 MICRON</td><td>6 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PH511-20-CG</td><td>69 MICRON</td><td>74 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-20-CGV</td><td>69 MICRON</td><td>74 MICRON</td><td>FLUOROCARBON</td></tr> <tr><td>PH511-40-CG</td><td>100 MICRON</td><td>125 MICRON</td><td>NITRILE</td></tr> <tr><td>PH511-40-CGV</td><td>100 MICRON</td><td>125 MICRON</td><td>FLUOROCARBON</td></tr> </tbody> </table>												BETA RATIO & EFFICIENCY				MODEL	BETA=200 99.5%	BETA=1000 99.9%	O-RING MAT'L	PH511-01-CG	15 MICRON	17 MICRON	NITRILE	PH511-01-CGV	15 MICRON	17 MICRON	FLUOROCARBON	PH511-03-CG	25 MICRON	27 MICRON	NITRILE	PH511-03-CGV	25 MICRON	27 MICRON	FLUOROCARBON	PH511-05-CG	41 MICRON	43 MICRON	NITRILE	PH511-05-CGS	41 MICRON	43 MICRON	NITRILE	PH511-05-CGV	41 MICRON	43 MICRON	FLUOROCARBON	PH511-10-CG	51 MICRON	53 MICRON	NITRILE	PH511-10-CGV	51 MICRON	53 MICRON	FLUOROCARBON	PH511-11-CG	10 MICRON	12 MICRON	NITRILE	PH511-12-CG	4 MICRON	6 MICRON	NITRILE	PH511-12-CGV	4 MICRON	6 MICRON	FLUOROCARBON	PH511-20-CG	69 MICRON	74 MICRON	NITRILE	PH511-20-CGV	69 MICRON	74 MICRON	FLUOROCARBON	PH511-40-CG	100 MICRON	125 MICRON	NITRILE	PH511-40-CGV	100 MICRON
BETA RATIO & EFFICIENCY																																																																																			
MODEL	BETA=200 99.5%	BETA=1000 99.9%	O-RING MAT'L																																																																																
PH511-01-CG	15 MICRON	17 MICRON	NITRILE																																																																																
PH511-01-CGV	15 MICRON	17 MICRON	FLUOROCARBON																																																																																
PH511-03-CG	25 MICRON	27 MICRON	NITRILE																																																																																
PH511-03-CGV	25 MICRON	27 MICRON	FLUOROCARBON																																																																																
PH511-05-CG	41 MICRON	43 MICRON	NITRILE																																																																																
PH511-05-CGS	41 MICRON	43 MICRON	NITRILE																																																																																
PH511-05-CGV	41 MICRON	43 MICRON	FLUOROCARBON																																																																																
PH511-10-CG	51 MICRON	53 MICRON	NITRILE																																																																																
PH511-10-CGV	51 MICRON	53 MICRON	FLUOROCARBON																																																																																
PH511-11-CG	10 MICRON	12 MICRON	NITRILE																																																																																
PH511-12-CG	4 MICRON	6 MICRON	NITRILE																																																																																
PH511-12-CGV	4 MICRON	6 MICRON	FLUOROCARBON																																																																																
PH511-20-CG	69 MICRON	74 MICRON	NITRILE																																																																																
PH511-20-CGV	69 MICRON	74 MICRON	FLUOROCARBON																																																																																
PH511-40-CG	100 MICRON	125 MICRON	NITRILE																																																																																
PH511-40-CGV	100 MICRON	125 MICRON	FLUOROCARBON																																																																																

B	FILTER. AREA	GF	4/26/00	GLF
A	REDRAWN	DPM	5/14/99	GLF
REV	DESCRIPTION	BY	DATE	APP

THE INFORMATION AND DATA CONTAINED HEREIN CONFORMS TO ASME Y14.5-M 1994

DRAWING STATUS: **PRODUCTION**

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE WITHOUT WRITTEN PERMISSION FROM THE HILLIARD CORP. © COPYRIGHT THE HILLIARD CORPORATION, ALL RIGHTS RESERVED. MAKE FROM:	UNLESS OTHERWISE SPECIFIED: <input checked="" type="checkbox"/> MACHINE UNLESS OTHERWISE SPECIFIED: BREAK CORNERS .015 MAX UNLESS OTHERWISE SPECIFIED: FRACTIONAL DIMENSIONS - ± 1/16 DECIMAL DIMENSIONS - .001 - 3 ANGLES - ± .5	 THE HILLIARD CORPORATION 100 WEST FOURTH STREET ELMSA, NEW YORK 14902 DIMENSIONS ARE IN INCHES () DIMENSIONS IN MM	DRAWN: GF 12/21/94 CHECKED: GLF 12/21/94 APPROVED: JB 1/5/95 SIMILAR TO: SCALE: NONE	TITLE: PH511-**-CG PLEATED INDUSTRIAL CARTRIDGE SHEET 1 OF 1 DD-700-24
---	--	--	--	--

C